

COUPLER SET FOR GREASE GUN



Reduce grease waste! Coupler set for lock couplers (JAE915)!

Prevent grease leakage by lubricating certainly with dedicated couplers depending on the location.


*Exclusive for lock coupler (JAE915) and lock coupler (long type).

Easy installation on lock coupler



4 couplers are shaped for lock coupler (JAE915) or lock coupler (long type)(JAE915L). Install and remove easily by inserting and lock to the edge.

Dedicated couplers for specific lubrication locations



Comfortable work by preventing grease leakage with suitable couplers. Four types of dedicated couplers are for lubricating locations such as sealed bearings and automotive spark plugs.

Easy access to grease nipples in secluded locations



Reach grease nipples in secluded locations by using long type coupler. Install and remove efficiently by one action.

COUPLER SET FOR GREASE GUN

No.	JAE5K	▼g 479	⊠1	MSRP ¥ 14,000
Lock coupler (long)			JAE915L	
Injector needle coupler			JAE915-IN	
Narrow needle coupler			JAE915-NN	
Seal off dispenser coupler			JAE915-SD	
Angle coupler			JAE915-AC	
Plastic case				

- Set of 4 couplers for lock coupler (JAE915) and lock coupler (long type)(JAE915L).
- Prevent grease leakage with four different shaped couplers match the lubrication parts.
- Lubricate grease nipples located deep inside the machine with lock coupler (long type). Only single action is needed for locking/unlocking of grease nipple.
- With a plastic case locking coupler (JAE915) can be put.




Plastic case
(W208×D151×H50)

One set of long lock coupler and 4 couplers suit for lubricating locations.

For lubricating narrow and deep areas such as sealed bearings and machine joints.


No.JAE915-IN
INJECTOR NEEDLE COUPLER



For grease nipples located in deep places that are difficult to reach before.


No.JAE915L
LOCK COUPLER(LONG)

*Screw size:
NPT1/8"-27 thread

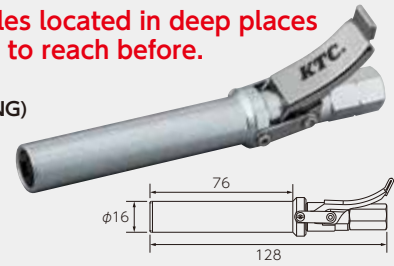


For lubricating road bike binding pedals.

No.JAE915-NN
NARROW NEEDLE COUPLER



For lubricating universal joints.


No.JAE915-AC
ANGLE COUPLER



Dedicated storage space for lock coupler (JAE915)

For lubricating automobile spark plugs
Rounded tip prevents scratching.

No.JAE915-SD
SEAL OFF DISPENSE COUPLER



Spare part

No.	Description	▼g	□	MSRP
JAE915L	Lock coupler (long)	159	1	¥ 8,000
JAE915-IN	Injector needle coupler	4	1	¥ 1,400
JAE915-NN	Narrow needle coupler	24	1	¥ 1,500
JAE915-SD	Seal off dispenser coupler	23	1	¥ 1,540
JAE915-AC	Angle coupler	34	1	¥ 2,150

LOCK COUPLER



No.	Screw Size	▼g	□	MSRP
JAE915	NPT1/8"-27	100	1	¥ 6,190

- Coupler for cordless grease gun (JAE911).
- A single action secured/unsecured grease nipple.

CORDLESS GREASE GUN SET



Plastic case
(W645×D303×H128)



No.	▼kg	□	MSRP
JTAE911	3.5	1	¥ 63,300

Type	Cordless Rechargeable Electric Grease Gun
Input voltage	18V DC
Applicable grease	Cartridge grease (bellows type) NLGI No.1-2 (400g)
Discharge capacity	70±5g/min (at 20°C and fully charged)
Maximum discharge pressure	40MPa
Attached nozzle	Flexible nozzle (750mm)
Work per charge (approximate)	Approx. 7 cartridge greases (bellows type)
Ambient operating temperature	0~50°C

[Contents]

Body (JAE911) x 1, Nozzle conversion adapter x 1, Flexible nozzle x 1,
Battery pack (JBE1820G) x 1, Battery charger (JHE180G) x 1, Power cord x 1,
Plastic case x 1

KTC KYOTO TOOL CO., LTD.

128 Sayama-Shinkaichi, Kumiyama-cho Kuse-gun, Kyoto 613-0034, Japan

Contact: contact@kyototool.co.jp Official site: en.ktc.jp

- All sizes on this leaflet are indicated as millimeter unless mentioned.
- There might be size differences between those mentioned on this leaflet and the actual products but they are under our specification.
- Product design might be changed for the improvement.

