

1/2"sq. TORQUE WRENCH FOR WHEEL MOUNTING QUICK WHEEL GUIDE PIN



Torque wrench for wheel bolts that require high tightening torque values!

Torque wrench for wheel mounting of 120 N·m and 140 N·m that does not requires torque setting. More safety and comfortable with quick wheel guide pin.

*Torque wrench for wheel mounting can be used for both wheel bolts and wheel nuts.



Issue of tightening wheel bolts

- Changing torque for each car models is complicated.
- Finding the suitable torque wrench model quickly.



Solution with our NEW torque wrench.

- Tightening torque for 120N·m or 140N·m easily.
- Easy to find the torque by the color of cover (yellow or green).

Issue of removing and installing wheel

- Take time to screw guide pin in.
- Difficult to install wheel with wheel bolts.



Solution with our NEW guide pin

- One-touch attaching and detaching without screwing the pin.
- Speedy positioning of wheel settings.

**No need to set torque for each tightening operation!
Torque wrench for 120N·m and 140N·m
which wheel mounting designed for 120N·m and 140N·m**



No.WCMPB120
Torque:120N·m

No.WCMPB140
Torque:140N·m

with plastic case
(Photo: WCMPB120)



Easy identification of the torque by the color.
(Yellow: 120N·m / Green: 140N·m)



Union Mechanism:
Prevent the socket from being removed from the torque wrench unless the push button is pressed.



1/2"sq. TORQUE WRENCH FOR WHEEL MOUNTING

No.	Sq. size	Torque (N·m)	L	B	T1	T2	Weight (kg)	☐	MSRP
WCMPB120	12.7	120	517	39	18	43	1.3	1	¥24,100
WCMPB140	12.7	140	517	39	18	43	1.3	1	¥24,100

[Applicable]

- WCMPB120: 120 N·m of specified torque (Subaru, Volkswagen, Audi, etc.)
- WCMPB140: 140N·m of specified torque (BMW, Toyota Supra, etc.)

*Some car models are not applicable. Please check the specified torque value by the manufacturer before using.

[Features]

- Torque wrench for wheel mounting of 120 N·m and 140 N·m that does not requires torque setting.
- Easy identification of the torque by the color.(Yellow: 120 N·m, Green: 140 N·m)
- Light shock to your hand and click sound to confirm specified tightening.
- Union mechanism that prevents the socket from being removed from the torque wrench unless the push button is pressed.
- ISO standards:Measurement accuracy of ±3% Only to measure in clockwise.
- *Available ratchet head repair kit (BR4E-K).
- *Recommend to calibrate and adjust when you use repair kit.


Spare part

REPAIR KIT FOR 1/2"sq. RATCHET HANDLE



No.	Sq. size	Contents	Weight (g)	MSRP
BR4E-K	12.7sq.	Drive gear, pawl, steel ball, spring, lever, knurled screw x 1 of each, countersunk screw x 2	144	¥3,990

*Repair kit for 1/2"sq. torque wrench for wheel mounting (WCMPB120, WCMPB140).

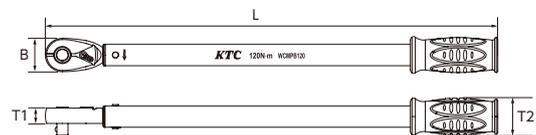

**One-touch quick detachable
Guide pin for wheel bolts**

One-touch detachable!



No need to worry about screw pitch.

**Quick installation.
Prevent wheel from falling off during installing!**



Easy to set quickly. Pin's unique hollowed shape prevents wheels from falling off.




QUICK WHEEL GUIDE PIN

No.	L	∅	D	Weight (g)	☐	MSRP
AH4-14150	150	123	12.2	145	1	¥1,400

•Guide pin for positioning wheel and preventing it from dropout for mounting wheels on vehicles.

- A ball plunger that can be attached and detached with a single touch.
- For wheel bolt size M14.



KTC KYOTO TOOL CO., LTD.

128 Sayama-Shinkaichi, Kumiyama-cho Kuse-gun, Kyoto 613-0034, Japan

Official site: en.ktc.jp

- All sizes on this leaflet are indicated as millimeter unless mentioned.
- There might be size differences between those mentioned on this leaflet and the actual products but they are under our specification.
- Product design might be changed for the improvement without the notifications.

