

# AIR BLOW GUN OIL SEAL PULLER



Cleaning threshing parts of the combine saw



Oil seal removal on agricultural machinery

## Improve the efficiency of maintenance and cleaning work for agricultural machinery!

Air blow gun with a long nozzle and a telescopic nozzle allows you to quickly clean deep and high places that are hard to reach. Oil seal puller allows you to pull out oil seals without damaging parts. Maintenance work for agricultural machinery and large vehicles can be performed smoothly.

Air blow gun that can quickly remove dust from high places and deep places.



The nozzle can reach saw barrel in a high place, making it possible to clean dust in deep places.

Long nozzle  
[YKAG-1055]

Telescopic nozzle  
[YKAG-3461]

Oil seal puller uses the principle of leverage to easily pull out even firmly attached oil seals.




AE460


Large oil seals used on axles of large agricultural machinery can also be replaced without damaging the parts.

# Two types of nozzle, long type or telescopic type! Quickly remove dust and moisture for maintenance by air power.


## Long nozzle [YKAG-1055]

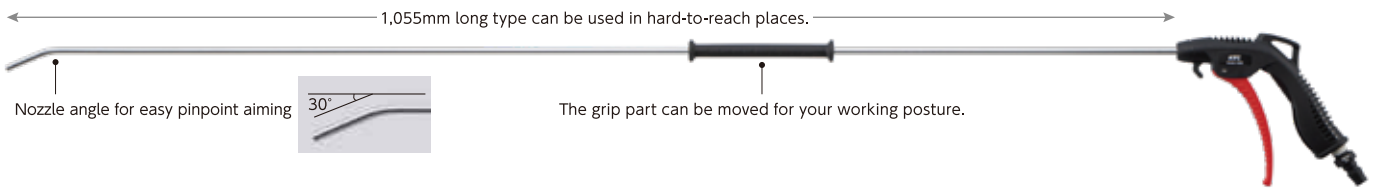


## Telescopic nozzle [YKAG-3461]

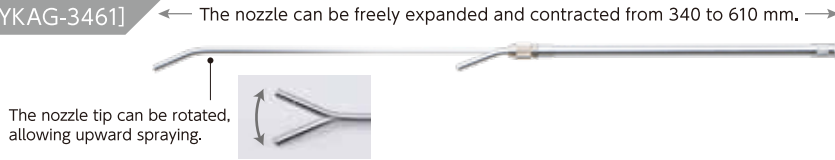

●YKAG-1055



●YKAG-3461



## AIR BLOW GUN


| No.       | Nozzle length | Nozzle diameter                          | Body material      | Environmental temperature | L       | Weight(g) | ⊖ |
|-----------|---------------|--|--------------------|---------------------------|---------|-----------|---|
| YKAG-1055 | 1,055         | Outer diameter 6.0<br>Inner diameter 3.4 | Reinforced plastic | -2.0~85°C                 | 1,212   | 240       | 6 |
| YKAG-3461 | 340~610       |  |                    |                           | 497~767 | 220       | 6 |

- Ideal for removing dust and moisture for maintenance.
- For blowing dust away from the threshing part of combine harvesters and cutter blades.
- Two types are available: a long nozzle that allows you to work at heights or away from dust, and a telescoping nozzle that is easy to handle.
- The tip shape is angled at 30° to ensure air is injected to the targeted location.
- Maximum working pressure 1.5MPa
- Blowout air volume 280L/min



- Dust may be scattered.
- Wear protective goggles or a mask when using.

# Easily remove oil seals without damaging parts!

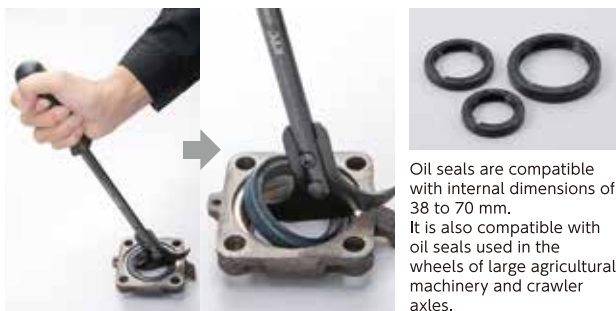


It can be easily pulled out using the principle of leverage.

Oil seals are compatible with internal dimensions of 38 to 70 mm. It is also compatible with oil seals used in the wheels of large agricultural machinery and crawler axles.

## OIL SEAL PULLER

| No.   | L1  | L2 | H    | h1 | h2   | Blade thickness | Weight (g) | ⊖  |
|-------|-----|----|------|----|------|-----------------|------------|----|
| AE460 | 315 | 64 | 84.5 | 40 | 44.5 | 3               | 440        | 12 |

- Special tool for oil seal removal work.
- Ideal for removing oil seals from axles of large agricultural machinery and crawler drive units.
- The cutting edge can be hung on the oil seal and easily pulled out using the principle of leverage.
- Work can be done efficiently by using different size blades depending on the size of the oil seal and the working environment.
- Oil seals are compatible with internal dimensions of 38 to 70 mm.
- With 1 spare blade



# Other products useful for maintaining agricultural machinery!

For oiling the crawler part!



CORDLESS GREASE GUN SET  
No.JTAE911

Comfortable maintenance work on damp soil!



WORK SHEET  
No.AYSH-1

For pulling out stuck engine hoses!



HOSE PLUCKER SET  
No.AE45T

Prevents over-tightening of wheel nuts on large agricultural machinery!



19.0sq.  
CORDLESS TORQUE LIMIT IMPACT WRENCH SET  
No.JTAE682

# KTC KYOTO TOOL CO., LTD.

128 Sayama-Shinkaichi, Kumiyama Kuse-gun, Kyoto 613-0034, Japan

Official site: en.ktc.jp

- All sizes on this leaflet are indicated as millimeter unless mentioned.
- There might be size differences between those mentioned on this leaflet and the actual products for the product tolerance.
- Product design might be changed for the improvement without the notifications.



ISO 9001  
JOA-2748



ISO 14001  
JOA-EM0680