

AIR GREASE GUN NOZZLE FOR GREASE GUN (1,000mm long nozzle)



Working with the flexible nozzle (included)



Working with the long nozzle (sold separately)

**Can be used safely even in high-pressure environments.
Allow continuous dispensing work just by pulling the trigger!**

With air regulator, allowing stable continuous discharge even in high pressure.
Flexible nozzle bends freely and allows you to reliably lubricate grease nipples even in deep places.

With air regulator, making it safe even in high-pressure.




Air regulator keeps the pressure constant and allows for stable continuous discharge.

Lock coupler (sold separately) prevents leakage and reduces grease loss.




Lock coupler (JAE915/915L) and lock coupler attachment set (JAE5K) can be connected.

It bends freely and reaches deep inside. Long nozzle is approximately 1m.



With a separately sold nozzle, you can reach even deep grease nipples.



AIR GREASE GUN

No.				
JAP910				1
Method	Air Powered	Discharge capacity	212g/min (grease temperature: 25°C)	
Input air pressure	0.4-0.9MPa (Recommended air pressure: 0.62MPa)	Maximum working pressure	0.83MPa (Recommended working pressure: 0.62MPa)	
Applicable grease	NLGI No.0~2	Environmental temperature	-10°C~50°C	
Capacity	400g (cartridge grease) 500g (hand packed)	Weight	1.7kg (main body, flexible nozzle, air regulator, air coupler)	

- Air-powered type requires no force for injection.
- Continuous dispensing is possible by simply pulling the trigger.
- Compatible with cartridges (400g) and manual filling (500g).
- With air regulator allows you to work safely even in high-pressure.
- With a flexible nozzle that can be bent freely.
- By replacing with a grease gun nozzle (1,000mm long nozzle) (G-1000NH), you can easily inject into a deep area.
- Air coupler PT1/4
- Nozzle size R1/8



•Do not use grease other than the one specified.
•Do not use without grease.

NOZZLE FOR GREASE GUN (1,000mm long nozzle)













No.				
G-1000NH				1


- With a length of 1m, it can reach even the grease nipples in deep places, allowing you to work comfortably.
- The hose part is made of nylon and can be bent freely for work.
- Grease leakage can be prevented by attaching a lock coupler (JAE915) or an attachment set for locking couplers (JAE5K) to the tip of the nozzle.
- Nozzle size R1/8

Reduce loss of leakage and achieve efficient and speedy work by combining nozzles and couplers depending on the lubrication points.



Dedicated coupler is specially designed to fit the locking coupler. It is easy to install and remove it by inserting and locking the tip.

Dedicated coupler	Lock coupler	Nozzle	The body of air grease gun																																										
<p>Ideal for lubrication of sealed bearings, mechanical joints, and narrow and deep areas.</p>  <p>INJECTOR NEEDLE COUPLER [JAE915-IN]</p> <p>Ideal for lubricating road bike binding pedals.</p>  <p>NARROW NEEDLE COUPLER [JAE915-NN]</p> <p>Ideal for lubricating car spark plugs. Tip is round and scratch-resistant.</p>  <p>SEAL DISPENSER COUPLER [JAE915-SD]</p> <p>Ideal for lubricating universal joints</p>  <p>ANGLE COUPLER [JAE915-AC]</p>	<p>Can be fixed/released on the grease nipple with one action.</p>  <p>LOCK COUPLER [JAE915]</p>  <p>LOCK COUPLER (LONG TYPE) [JAE915L]</p>	<p>Flexible nozzle that bends freely</p>  <p>FLEXIBLE NOZZLE (included)</p>  <p>GREASE GUN NOZZLE (1,000mm LONG NOZZLE) (sold separately) [G-1000NH]</p>	<p>Continuous grease dispensing work is possible just by pulling the trigger.</p>  <p>AIR GREASE GUN [JAP910]</p>																																										
<p>Other grease gun nozzles</p> <table border="1"> <thead> <tr> <th>No.</th> <th>Nozzle</th> <th>Chuck</th> <th>L (mm)</th> <th>Weight (g)</th> <th>□</th> </tr> </thead> <tbody> <tr> <td>G-120NS</td> <td>Straight nozzle</td> <td>×</td> <td>115</td> <td>25</td> <td>1</td> </tr> <tr> <td>G-180NS</td> <td>Straight nozzle</td> <td>×</td> <td>180</td> <td>50</td> <td>1</td> </tr> <tr> <td>G-250NS</td> <td>Straight nozzle</td> <td>×</td> <td>250</td> <td>70</td> <td>1</td> </tr> <tr> <td>G-450NS</td> <td>Straight nozzle</td> <td>×</td> <td>450</td> <td>103</td> <td>1</td> </tr> <tr> <td>G-190NC</td> <td>Vent nozzle</td> <td>○</td> <td>172</td> <td>90</td> <td>1</td> </tr> <tr> <td>G-330NH</td> <td>Hydro hose nozzle</td> <td>○</td> <td>337</td> <td>140</td> <td>10</td> </tr> </tbody> </table>				No.	Nozzle	Chuck	L (mm)	Weight (g)	□	G-120NS	Straight nozzle	×	115	25	1	G-180NS	Straight nozzle	×	180	50	1	G-250NS	Straight nozzle	×	250	70	1	G-450NS	Straight nozzle	×	450	103	1	G-190NC	Vent nozzle	○	172	90	1	G-330NH	Hydro hose nozzle	○	337	140	10
No.	Nozzle	Chuck	L (mm)	Weight (g)	□																																								
G-120NS	Straight nozzle	×	115	25	1																																								
G-180NS	Straight nozzle	×	180	50	1																																								
G-250NS	Straight nozzle	×	250	70	1																																								
G-450NS	Straight nozzle	×	450	103	1																																								
G-190NC	Vent nozzle	○	172	90	1																																								
G-330NH	Hydro hose nozzle	○	337	140	10																																								
 <p>Straight nozzle</p>  <p>Vent nozzle</p>  <p>Hydro hose nozzle</p>																																													

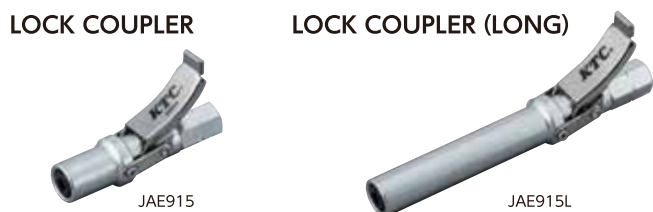

No.	Weight (g)	Screw size	□
JAE915	100	NPT1/8"-27	1
JAE915L	159	NPT1/8"-27	1

•Can be fixed/released on the grease nipple with one action.
*Pitch is 0.9mm.

COUPLER SET FOR GREASE GUN



Comes with plastic case (W208×D151×H50)

No.	Weight (g)
JAE5K	479

Contents	
Lock coupler (long type)	JAE915L
Injector needle coupler	JAE915-IN
Narrow needle coupler	JAE915-NN
Seal dispenser coupler	JAE915-SD
Angle coupler	JAE915-AC
Plastic case	

•Set of 4 types of couplers and lock coupler (long type) [JAE915L].
•The 4 types of couplers have special shapes that match the lubrication points to prevent grease leakage.
•Lock coupler (long type) allows you to lubricate grease nipples in deep places. Can be fixed/released to the grease nipple with one action.
•Comes with a dedicated plastic case that has storage space for the lock coupler [JAE915].

KTC KYOTO TOOL CO., LTD.

128 Sayama-Shinkaichi, Kumiyama Kuse-gun, Kyoto 613-0034, Japan

Official site: en.ktc.jp

- All sizes on this leaflet are indicated as millimeter unless mentioned.
- There might be size differences between those mentioned on this leaflet and the actual products for the product tolerance.
- Product design might be changed for the improvement without the notifications.

