

FILTER OIL CATCHER

MAIN APPLICABLE CAR MODELS

R06A

SUZUKI Alto, Wagon R, Jimny, etc.

1NZ-FXE

TOYOTA Prius, Prius-c, Yaris, etc.

HR12DE

NISSAN Micra, Serena, etc.



Effortless removal of short oil filters, without the mess. **Designed for 63mm / 64mm 14pt. filters.**


This tool allows you to securely remove the oil filter while catching any leaking engine oil—ensuring a mess-free and hands-clean operation.



FILTER OIL CATCHER

No.	L	D	Weight(g)	☐
AVP-6364	105	80	70	1

- Special tool for removing downward oil filters.
- The multi-stage cup shape is compatible with 63mm and 64mm-tetradecagon oil filters.
- Compact size allows the short oil filter to be removed.
- Removes oil filters without getting your hands dirty, saving cleanup time and improving work efficiency.
- Lightweight and oil resistant, and dirt is not easily noticeable.
- *This product is not an oil filter wrench. Please use an oil filter wrench for loosening the filter.




Issue

In vehicles with limited engine bay space, short oil filters can be extremely difficult to remove due to the filter position and engine layout.

Solution


The compact AVP-6364 fits 63mm and 64mm filters, ensuring easy removal even in tight spaces. Now compatible with short oil filters.

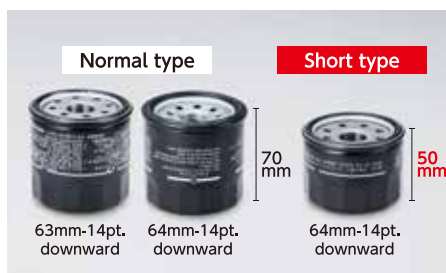

Compact size allows easy removal of short oil filters.

AUTOMOTIVE SPECIALTY TOOLS

Loosen with an oil filter wrench

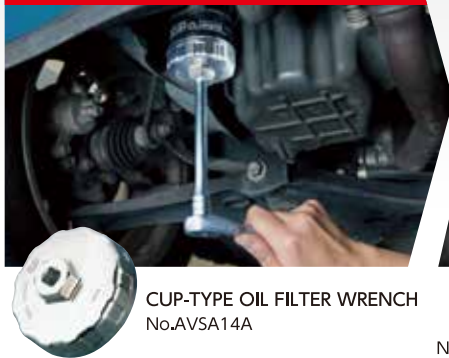

CUP-TYPE OIL FILTER WRENCH
No. AVSA14A

Change the oil filter without getting your hands dirty



FILTER OIL CATCHER
No. AVP-6376
No. AVP-6364
Details on the front

Prevent oil leaks with a torque wrench



DIGITAL RATCHET
No. GEW050-R3

Oil filter wrench set of 14, from 63mm to oil filter wrenches for TOYOTA paper oil filter.

3/8" sq. 14 pcs.

Search for filter wrenches that are suitable for Japanese and other countries cars!

Oil filter wrench application table



CUP TYPE OIL FILTER WRENCH SET [14pcs.]

No.	Weight (kg)
AVSA14A	4.1
Contents	
CUP-TYPE OIL FILTER WRENCH	AVSA-063,064,067,073,074,075D,079,080,089,A92,099,101
OIL FILTER WRENCH FOR TOYOTA PAPER OIL FILTER Case (W550×D380×H115)	AVSA-R64A2,R64B2

- Used for removing and installing automobile oil filters.
- Compatible with all oil filters for Japanese passenger cars sold since 2005year.
- *As of September 2024year (Fully compatible even with rare vehicles equipped with uniquely shaped oil filters.)
- With this set, you can quickly and reliably change oil filters on any vehicle that comes into your shop.
- The storage case features a newly designed blow-molded plastic construction. Being made of resin, it won't scratch surrounding parts and is both lightweight and durable—making it easy to carry.

Downward oil filter.
Supports removal of 4 major sizes!

Oil filter compatible size

Outside diameter	Number of edges	Applicable engine examples
63mm (64mm)	14 pt.	R06A, K6A etc.
64mm (65mm)		R06A, 1NZ-FXE, HR12DE etc.
67mm (68mm)		EJ20, PE-VPR etc.
76mm (76mm)	15 pt.	5H-VPTS, S5-DPTS etc.

*The outside diameters of other manufacturers are shown in brackets.




Web catalogue



FILTER OIL CATCHER

No.	L	D1	D2	Weight (g)	□
AVP-6376	178	90	62	64	1

- Designed for removing oil filters mounted facing downward after loosening them.
- Prevents hand contamination by replacing the usual bare-hand or rubber glove handling.
- Made of polypropylene, offering lightweight and excellent oil resistance.
- Multi-step cup design fits the four main sizes of downward-facing oil filters.



Digital display prevents oil leakage due to overtightening

3/8" sq. 36

Repair Spare part Repairable



Web catalogue



DIGITAL RATCHET

No.	Torque Measurement Range (N·m)	Torque Measurement Accuracy	Minimum display unit	L	A	B	T1	T2	D	R	Weight (g)	□
GEW050-R3	10~50	±3%+1 digit	0.01	277	42	33	13.7	38	35	200	520	1

- When the target torque range is reached, the tool notifies you with light, sound, and vibration, allowing for more precise torque measurement. (The vibration function can be turned ON or OFF.)
- The backlight display ensures clear torque readings, even in dark work environments.
- Register up to 5 target torque ranges. Switch between them at the push of a button to work seamlessly across multiple points.
- Equipped with a power sensor and fixed grip, it delivers accurate measurements regardless of working posture or skill level.



KTC KYOTO TOOL CO., LTD.

128 Sayama-Shinkaichi, Kumiya Kuse-gun, Kyoto 613-0034, Japan

Official site: en.ktc.jp

- All sizes on this leaflet are indicated as millimeter unless mentioned.
- There might be size differences between those mentioned on this leaflet and the actual products for the product tolerance.
- Product design might be changed for the improvement without the notifications.

